

## 42650-SO SS Drain 12" Round Top, 10" Deep, Side Outlet **Specification**


Josam series 42650 fabricated stainless steel (type 304), 12" round top, 10" deep, with no-hub side outlet, anchor tabs and perforated SS grate (standard).

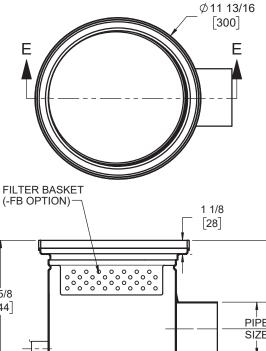



STANDARD GRATE FREE AREA = 42.4 IN<sup>2</sup>

MEETS ADA AND HEEL-PROOF REQMT.



## Ø117/16 [290]

		 		2	 
-FB	Filter basket		-CF	Clamp and flange	
-SB	Sediment bucket		-NG	No grate	
-VP	Secured grate		-HG	Perf. half grate	$\left  - \right $
-SO	Side outlet		-3Q	Perf. 3/4 grate	Ц
-50	1/2" primer tap		-MG	Mesh, anti-slip grate	
-T	Threaded outlet		-LG	Ladder grate	<u> </u>
-BW	Butt-weld outlet (spec. 10, 40, 80)		-SG	Perimeter slot grate	
-PFO	Push-Fit outlet		-316	Type 316L material	

Model	Pipe size	А
42653	3"	7.4 [188]
42654	4"	6.9 [175]
42656	6"	5.9 [150]

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:



A WATTS Brand

T: (800) 365-6726 • Josam.com